

PXDUO-50 Specifications

HITACHI
Inspire the Next

Hardware Specifications

Main Unit

Model No.	PX-DUO-50
Display Type	Plasma Overlay (Plasma not included)
Digitizing Technology	Infrared Image Sensor System
Coordinate Resolution	Approx. 500 lpi
Tracking Speed	Approx. 100 points/s (USB 1.1 full speed)
Interface to Computer	USB 1.1, 2.0 (cable length: 21 ft.)
Effective Detection Area	50 inches
Power Consumption	5V, 500mA (USB Bus Power)
External Dimensions	48"(W) x 33.3"(H) x 2.6(D)
Digitizer Weight	Approx. 16.5 lbs.
Operating Requirements	41-95 °F (5-35 °C) 20-80% Humidity
Function Buttons	16 (14 customizable)
Certificates	VCCI-B, FCC-B, CE
Warranty	1 year warranty

Electronic Pen

Communication System	Infrared
Power Supply	AAA Alkaline
Battery Life	Approx. 80 hrs (continuous use)
Function Buttons	3



Others

Packing Dimension	52(W) x 6.3(H) x 38.6(D)
Packing Weight	Approx. 33.7 lbs.
Supplied Accessories	2 retractable styluses, electronic pen w/ AAA Alkaline battery, Users Guide
Electronic Pen Warranty	1 year warranty

Required Components

Plasma Display Models	TH-50PH9, TH-50PF9, TH-50PH10, TH-50PF10, TH-50PH11, TH-50PF11, TH-50PH12, TH-50PF12, TH-50PD12 (Panasonic)
------------------------------	---

Standard Features

- Control using multi-touch hand gestures
- Use your finger, stylus, or any object to operate
- 16 Function buttons (14 customizable)
- Available in both 50" and 65" dimensions
- Electronic pen with 3 customizable buttons included
- StarBoard Software included
- Interactive presentation without the need for a projector
- Easy hardware installation

System Requirements

PC Requirements

CPU	Intel Pentium 4 1.8GHz or higher
RAM	1 GB or more is recommended
HDD	300 MB of free space
Display Color Depth	16 bit or more
Software Required	I.E. 6.0 or higher / DirectX 9.0c / MS Office 2000 or higher, Windows Media Player 9.0 or higher, Adobe Acrobat 5.05 or higher for importing documents
Hardware Required	CD-ROM
OS	Microsoft Windows 2000/XP/Vista, latest service pack must be applied (Tablet PC, 64bit, and Server Edition are currently not supported)
Other	Video card w/ hardware overlay for video function

Mac Requirements

CPU	Intel® processor
RAM	1 GB or more is recommended
HDD	300 MB of free space
Display Color Depth	16 bit or more
Software Required	MS Office 2004 or higher for importing documents / Quick Time 7.1 or higher
Hardware Required	CD-ROM
OS	Mac OS X 10.4, 10.5, latest service pack must be applied (Mac OS X 10.6 Snow Leopard is currently not supported)
Other	Built-in display or display connected to Apple supplied video card supported by your Mac


Hitachi Software Engineering America, Ltd.

900 Hitachi Way Chula Vista, CA 91914
Telephone: 1-800-HITACHI
starboard@hitachi-soft.com
www.hitachi-soft.com


PXDUO-50 Specifications

Dimensions


Top View




Front View

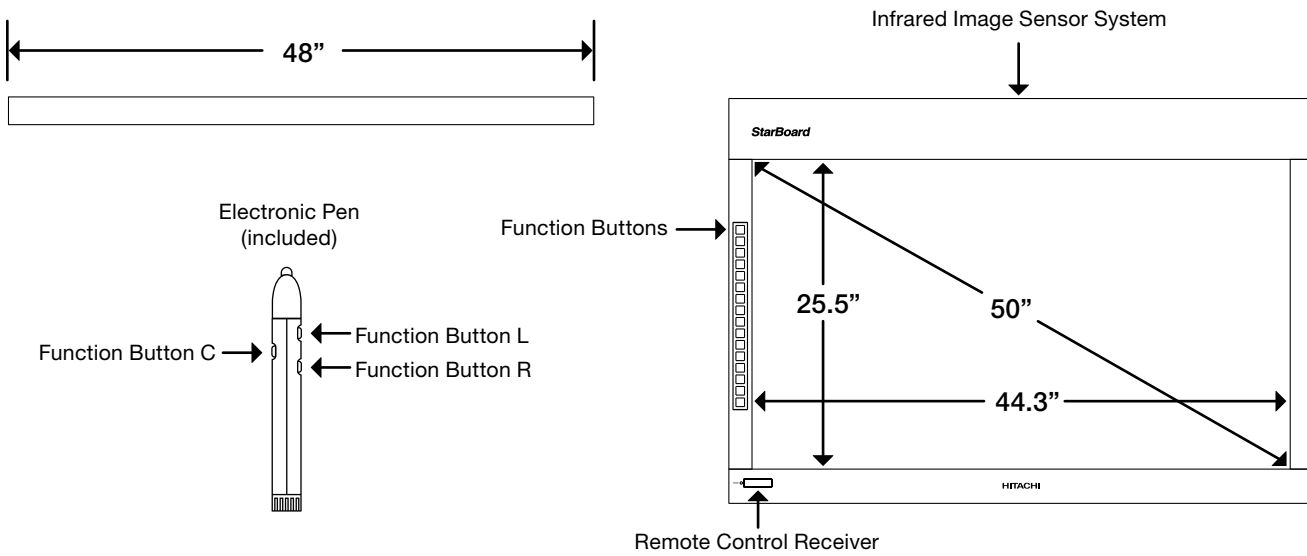

Back View

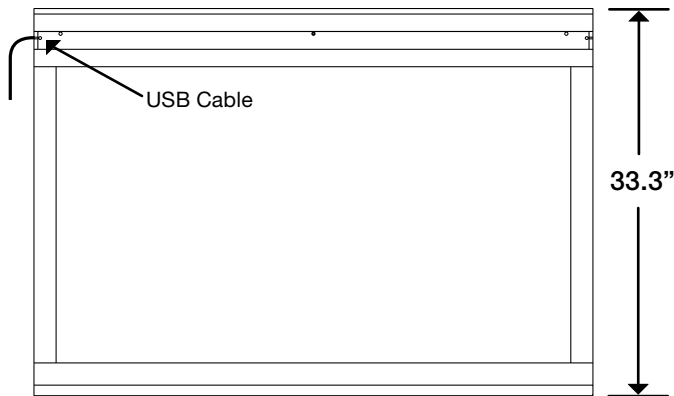

Side View

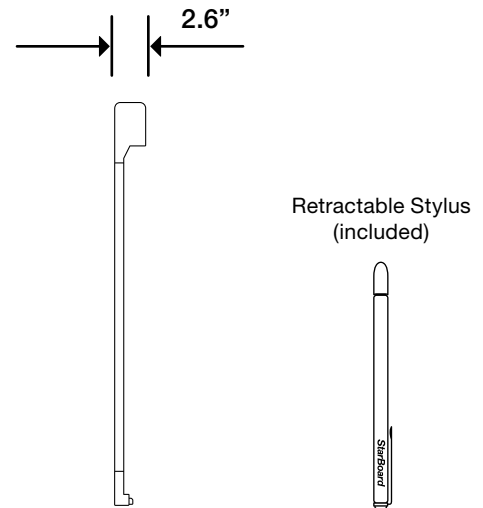

Hitachi Software Engineering America, Ltd.

900 Hitachi Way Chula Vista, CA 91914
Telephone: 1-800-HITACHI
starboard@hitachi-soft.com
www.hitachi-soft.com